

FROM \$69,800+GST

# LF3015E FIBER LASER

Economical Open Fiber Laser

Bed Size: 1500x3000mm Bed

Laser source : MAX, Raycus or IPG

Power : 1kW, 1.5kW, 2kW, 3kW






“The LF3015E is our best value 3000x1500mm bed sized machine. With YYC rack and pinion drive system, French “Moto Reducer” motor reducer, Raytools laser head, Cypcut software and BCS100 surface tracking system, you are getting top-of-the-line components and software at an entry-level price. Durable, reliable and precise, this is the machine that you to get you started in the fiber cutting, then keep for 20 years.”

## FEATURES:

- 3000x1500mm open bed Class 4 laser with option to add Class 1 full enclosure
- Cypcut software - Easy to use and compatible with most files
- Automatic edge seeking
- BCS100 Automatic material tracking - Follows material surface allowing cutting of materials with slight bending or warping
- BOCI or Raytools precision automatic focussing laser head
- Positioning and re-positioning accuracy 0.03mm
- Large Portrait style monitor screen
- Built-in computer, screen, and wireless controller
- Aviation 3rd generation aluminium gantry - Lightweight/strong
- Delta servo motor drive
- Taiwan APEX rack pinion and gear system
- Nidec Shimpo gear reducer
- Heavy pallet welded bed - for increased stability and lifetime
- Automatic lubrication system
- Ball bearing rollers for loading on the front
- Drive assembly below the bed on both sides allowing for easy loading and offloading
- Protective cover for drive system
- Industrial S&A water cooling unit
- Under table exhaust system, high pressure exhaust fan included
- Electronic regulators for all gas connections O<sub>2</sub>, N<sub>2</sub> and compressed air, allowing for fully software-controlled pressure



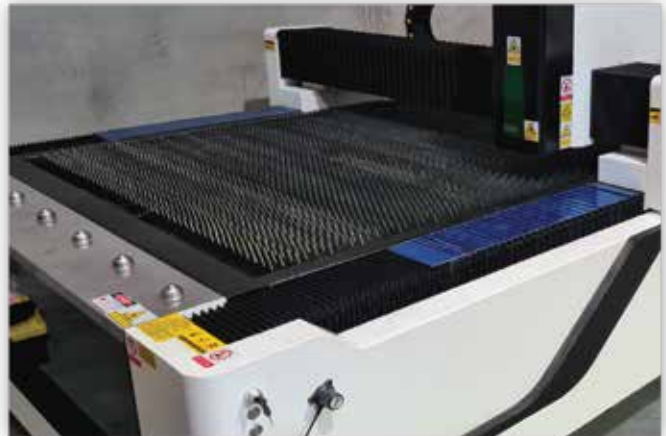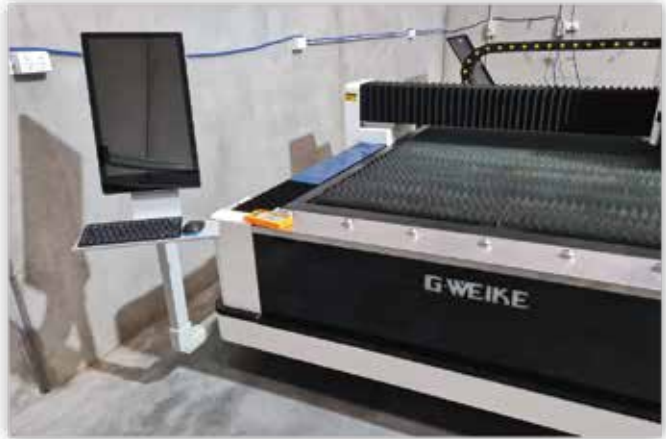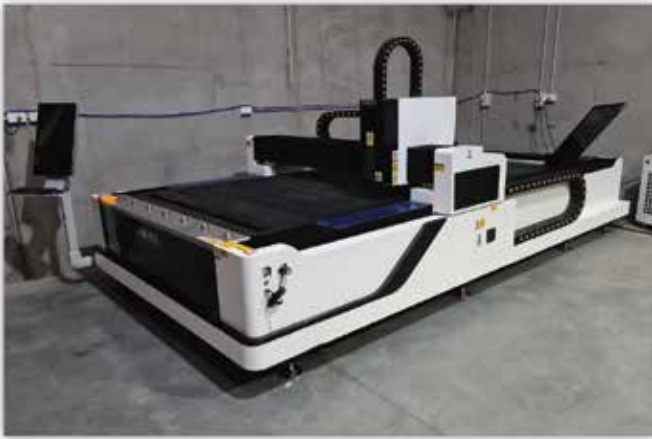

“Highlighting above the compact built in electrical cabinet with fan cooling, easy loading from any side, ball rollers on front side and 180degree pivoting control screen arm, with portrait style large control screen.”

Technical Parameters	Specification
Laser Power	1kW / 1.5kW / 2kW / 3kW
Bed size	3000 x 1500mm (also available in 4000x1500mm, 4000x2000mm, 6000x2000mm)
Machine Size	4600*2450*1700mm
Laser source type	MAX, Raycus or IPG
Laser Head Type	Automatic focussing laser head 1-2kW = Raytools BM111 3kW = BOCI BLT421
Cooling Type	Industrial Water Cooling – S&A water chiller
Moving Speed	60m/min
Acceleration	0.8G
Laser Output Control	0-100% set by software
Drive method	YYC Rack and pinion system, Moto Reducer gear reducer, with Delta motor drive
Positioning Accuracy	0.02 mm
Re-positioning accuracy	0.02mm
Minimum line width	0.1mm
Controlling Software	Cypcut Control System 2000E, including nesting, edge seeking and automatic crash protection
Graphic Format Supported	Graphics files - Ai, DXF, PLT, Gerber, G code – MaterCam, Type3, Wentai etc.
Compatible Software (for outputting supported formats)	Illustrator, photoshop, CorelDraw, Autocad, Solidworks, MaterCam, Type3, Wentai etc.
Colour Separation	Yes (imports colours to control cutting layers)
Auxiliary Equipment	Exhaust Fan, Industrial water cooling unit
Power Supply	Machine: 1kW = 415V 50Hz 20amp 1.5kW = 415V 50Hz 32amp 2kW = 415V 40Hz 40amp 3kW = 415V 50Hz 50amp
Gas Regulation	Software controlled electronic low- pressure O2 regulator (for fine adjustment at low pressure) And high pressure N2 and Compressed air electronic regulator (high pressure cutting)
Gas connection	O2 (mild steel and copper cutting) – 4 pack min Min 99.7% purity – 10m3/h maximum flow rate – 10bar max pressure N2 (Stainless, Aluminium, Brass and thin Mild steel cutting) – 9 pack min Min 99.9% purity – 40m3/h maximum flow rate – 24bar max pressure <b>Compressed air (Stainless, Aluminium, Brass and thin Mild steel cutting)</b> <b>SEE OUR 18DHY-18Bar or 20DHY-20Bar COMPRESSOR OPTIONS</b>
Working Environment	Temperature:0-45C, Humidity 5-95% (No Condensate Water)